

## ■ LFLD Electromagnetic Flowmeter

LEFOO

- High accuracy
- Good reliability
- ...

- Good pressure sealing and high intelligence.
  - No pressure loss, lower requirements for straight pipe section.
  - Good corrosion resistance and wear resistance.
  - The converter can be in the same shape or separate form with the sensor.
  - Two-way measurement system, which can measure forward flow and reverse flow.
  - Special production process and high quality materials are adopted to ensure that the performance of products remains stable for a long time



Nominal pressure  
Lining material


Lining material	rubber, polyperfluorinated ethylene propylene, PFA, ceramics, etc.
Connecting flange material	Carbon steel, stainless steel(304, 316, 316L)
Signal electrode form	Fixed, scraper type
Protection	IP65, IP68
Transmission distance	Split type electromagnetic flowmeter. The sensor and converter are connected by a signal cable the cable length should be less than 100m
Peak flow rate	15m/s
Electrical Connection	Terminal
Electrical Connection	$\geq 50 \mu S/cm$
Consumed power	<20W
Environmental temperature	-25°C - 60°C
Electrode material	316L, HastelloyB, HastelloyG, Titanium, tantalum, platinum-iridium alloy, tungsten carbide
Ground ring material	Stainless steel 1Cr18Ni9Ti
Number of electrodes	Standard 3 electrodes (two measuring electrodes, one impact electrode)
Certification	CE、ROHS



www.oxfordtextbooks.co.uk

## Chemical fiber, food metallurgy, water su- protection

- protection.
  - Hydraulic engineering, iron and steel, petroleum, pharmaceutical, beer, wort, all kinds of drinks.
  - Corn pulp, fiber pulp, syrup, lime milk, sewage, cooling raw water.
  - Drainage, salt water, hydrogen peroxide, black liquor and other conducting fluid media flow.

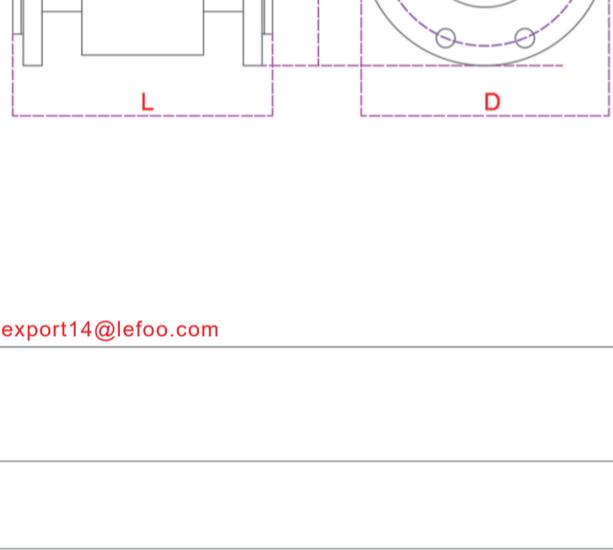

Content Continues

Table 1. Summary of the main characteristics of the three groups of patients.

Type
Electromagnetic flowmeter

0.6	(DN1200-DN2000)
0.6	(DN2200-DN3000)
0.6	(DN3200-DN4000)

al pressure

3  
4

1	Stainless steel 0Cr18Ni12Mo2T	4	titanium	7	Stainless steel coated with tungsten carbide	Electrode materials	
2	The type of alloyB	5	Platinum-iridium alloy				
3	The type of alloyC	6	tantalum				
1	IP65					Shell protection	
2	IP68+1P65 (The sensor is polychloroprene rubber sensor IP68+ converter IP65 or polyurethane -explosion-proof separation type is optional)						
0	无					Explosion-proof marks	
1	Exdm IICT4 (No acetylene) ( A shape, IP65, Magnetic bond or no display)						
2	Exdm IICT4 (No acetylene) ( separation type, IP65, Magnetic bond or no display)						
3	Exdm IIIT4 (No acetylene) ( separation type, IP65, Converter in safe zone)					Attachment	
0	无		2	grounding electrode	4	Electrode scraper mechanism	
1	grounding electrode		3	Inlet protection flange			
1	Erseparation type, Chinese and English Menu					Structure	
2	Eh A shape, Chinese and English Menu						
☆	Separate type special cable with meter 10M . More than 10 M needs to be customized.						
1	85~265V 45~400Hz					Power	
2	11~40VDC						
MA	MA Key, double line display, output standard						
MB	MB Key, double line display, output standard, RS485					Converter form	
LA	LA Key, double line display, output standard						
LB	LB Key, double line display, output standard, RS485, HART						
AA	AA Key, English menu, double line display, output standard, RS232						
LFLD-DN50	1.6	1	1	1	0	MA	Selection example

Email: export14@lefoo.com

TEL: +86-18268876736 www.lefoogroup.com

## Electromagnetic Flowmeter parameter